

Eaglerock Scaffold Assembly Instructions


WARNING: FAILURE TO FOLLOW ASSEMBLY AND USE INSTRUCTIONS MAY LEAD TO SERIOUS INJURY OR DEATH

STEP 1:

Install casters by standing ladder in upright position with “stacking pins” resting on floor. Position caster pin in ladder bushing at a square angle and **lightly** hammer on wheel until base of caster is even with ladder edge.


STEP 2:

Place ladder on its side with holes facing in. Squeeze handle on truss and align pin with the holes in ladder. Release handle and **make sure the pin snaps completely inside ladder holes**. Leave partially assembled unit on floor as shown.

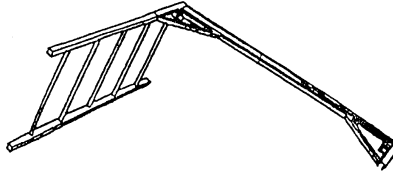


STEP 3:

Position remaining ladder under other end of truss as shown. Squeeze handle and line up with same height adjustment hole as the other ladder. Release handle and **make sure it snaps completely inside ladder holes**.

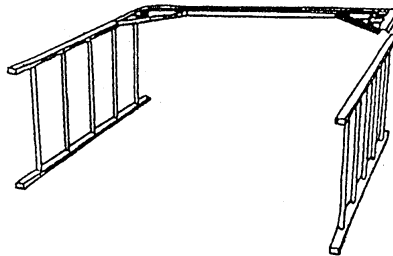

STEP 4:

Hold partially assembled unit by the truss and stand upright. Attach second truss as described in STEPS 2 AND 3, making sure to position truss at the same height as the first.

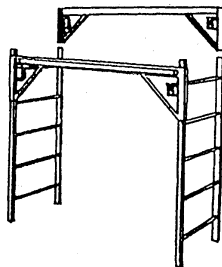

STEP 5:

Place plywood platform onto both truss flanges. Make sure it is sitting flat all around. Always lock casters when in use.

IMPORTANT: SEE SAFE USE INSTRUCTIONS AND ALWAYS FOLLOW.

Eaglerock Scaffold Use Instructions

WARNING: FAILURE TO READ AND FOLLOW INSTRUCTIONS COULD LEAD TO SERIOUS INJURY OR DEATH.

CAUTION: ELECTRICAL SHOCK HAZARD. NEVER USE WHERE CONTACT MAY BE MADE WITH ELECTRICITY.

LOAD RATINGS: DO NOT EXCEED 1,000 LB. / 450 KG. ON SINGLE OR STACKED UNITS.

ALWAYS INSPECT PRIOR TO USE:

1. Do not use if damaged or missing parts. Return for repair or discard.
2. Check all parts for good working order.
3. Make sure units are free from wet paint, mud, grease or other slippery materials.
4. Discard if exposed to fire or chemicals

CARE AND TRANSPORTATION:

1. Store in a dry area.
2. Regular lubrication of handle mechanism using standard lubricating oil will insure ease of assembly and long-life use.
3. Properly secure and support in transportation and in handling.

USE:

1. Check local regulations prior to stacking more than two 6 foot units. Never stack more than three 6 foot units. **Never stack without guardrails and outriggers.**
2. Only for inside use. Use on firm level surface. Always lock casters before climbing.
3. Always install guardrails, kickboards and outriggers when using stacked units.
4. Mount platform by climbing rungs and climbing over top of end frame. Do not swing around end frame to reach platform.
5. Total combined weight of man and materials must not be greater than load rating for scaffold. Never overload scaffold. Load rating decreases by weight of stacked units.
6. Never drop or apply impact load to scaffold ladders, trusses or platform.
7. Metal scaffold **conducts electricity**. Do not use where contact can be made with electricity.
8. Do not over reach, move scaffold instead.
9. Never climb onto scaffold from a ladder.
10. Never use ladders or other devices on scaffold to gain greater height.
11. Never allow loose objects to accumulate on platform.
12. Never move scaffold with anyone on platform or ladders.
13. Never use in front of unlocked doors.
14. Never use while in poor health or while taking drugs or under the influence of alcohol.
15. Never leave assembled unit unattended.

Your safety and satisfaction are important to us. Any defects in *Falcon Ladder & Scaffold mfg.* products must be reported immediately to your distributor. You may be asked to return the defective parts. Defective parts will be replaced without cost.